

Steam Generator PS400

electrical heated steam generator

Model	PS400-60	PS400-70	PS400-80
Electrical connection			
Input supply voltage	400 V, 50 Hz, 3 Ph/N/PE		
Heating boiler!	60 kW	70 kW	80 kW
Total connection	approx. 60 kW	approx. 70 kW	approx. 80 kW
Net protection	100 A	125 A	125 A
Outgoing signals	dry contacts: operation fault additional messages on request		
Incoming signals (optional and negotiable)	emergency OFF, remote start, external blowdown, etc dry contacts must be made available		
Mechanical connection			
Steam outlet	ball valve ¾" i		
Water inlet	½" i		
Draining	ball valve ¾" i		
Safety valve	1" i		
Operating data			
max. operating temperature	150°C / 180°C		
max. operating pressure	5 bar or 10 bar (blow-off safety valve)		
adjustable working pressure	0-4 bar or 0-9 bar adjustable in increments of 0.1 bar		
max. amount of steam	84 kg/h	98 kg/h	112 kg/h
water content to NW	22 liter		
Dimensions			
Length	approx. 1000 mm		
Width	approx. 550 mm		
Height	approx. 950 mm		
Weight	approx. 100 kg (unfilled)		



Steam generator PS400

electrically heated steam generator

Housing

Base frame and hood made of stainless steel with integrated switch cabinet

Boiler casing

Casing made of stainless steel 1.4571, electrically welded

Electrical equipment

Control panel wired in accordance with VDE regulations (Association of German Electrical Engineers), visual water level indicator SiemensLOGO! PLC control, operating display, electronically controlled water level, heating element made of stainless steel, heating capacity adjustable in step (Exception: PS200-10 has only one heater)

Safety devices


Overpressure safety valve (5bar or 10bar), overpressure limitation (mechanical), overpressure limitation (electronically), operational temperature limiter, electronically protection against water deficiency

Other devices

DREWS controller, pressure gauge, operating hour counter, temperature display, water level display min/max, illuminated controls, stainless steel fittings

Equipment for PS- steam generators

stationary or mobile consoles,
feed water vessels, condensate
tanks,
drain water vessels, automatic
blow-down systems, water
softening equipments, steam
traps,
steam superheater,
steam distribution,
steam valves,
other equipment on request

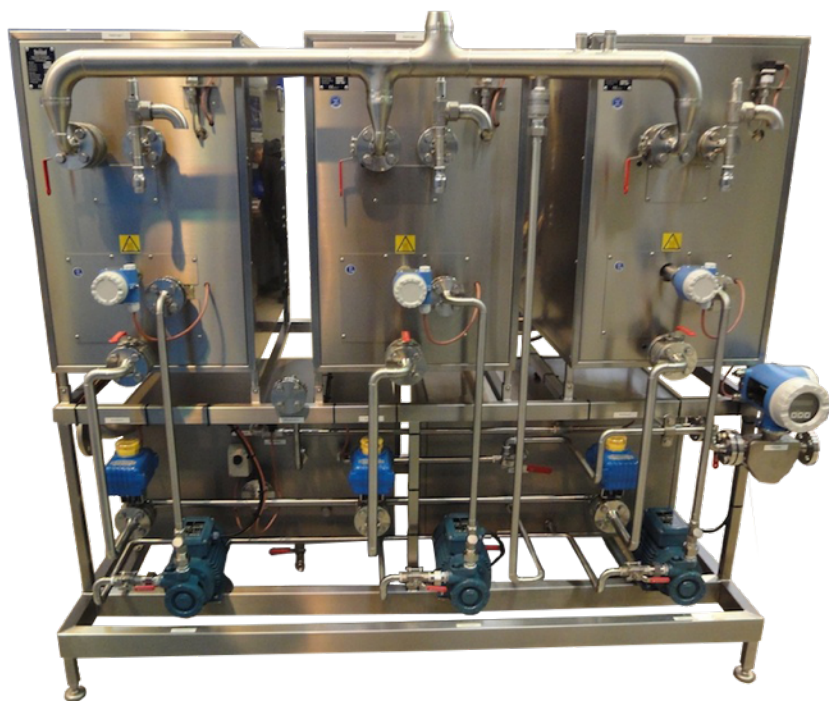

Multi-systems

Because of the individual variety of our modular system it is possible to combine several steam generators. As a result you get a multi-system with a higher steam-output.

